

Compact: Easy & Accurate Fork Positioning



Uses standard ISO lift truck forks



Heavy duty pin-type fork actuators



Protected hydraulic cylinders



Excellent driver visibility



Hang on installation (no welding)

APPLICATIONS

The 55G/100G Side Shifting Fork Positioner saves the operator time and energy positioning the forks, improves operator ergonomics, as well as reducing pallet and product damage caused by incorrect fork position.

The G-Series fork positioners allow the driver to accurately position and sideshift the forks from the driver's seat. Combines fork positioning and side shifting in one compact unit. Designed as a compact unit with optimal visibility and excellent specifications it provides the optimal productivity improvement for your lift truck. A combination of quality, low price and excellent performance far outperforms most fork positioners on today's market.


OPTIONS

- Bolt-on backrest 1200 mm and 1500 mm height available.
- Non side shifting model available.
- Special frame widths and opening ranges.
- Quick disconnect lower mounting hooks.


FEATURES

- Quick and easy installation.
- Hang on installation (no welding).
- Uses standard ISO lift truck forks.
- Rugged heavy duty fork actuators run in bronze bearings on a large diameter chrome shaft. Provides smooth fork movement.
- Actuator design has adjustment to accept 80 mm up to 130 mm wide forks.
- Compact nested hydraulic cylinders are well protected against damage.
- External sideshift with a double acting center mounted sideshift cylinder provides constant 100 mm sideshift at all fork positions.
- Side Shifter bearings and actuator bearing are greaseable.
- Compact valve block contains equalizing speed adjustment is protected and center mounted to enable easy installation.
- Excellent driver visibility over and through the frame.

Separate Sideshift

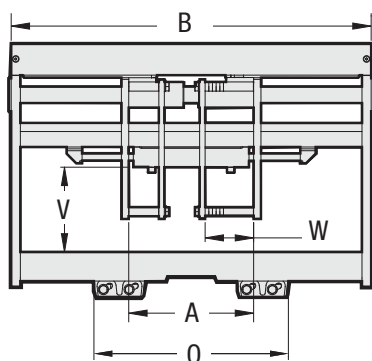

Fork Positioners with adapters

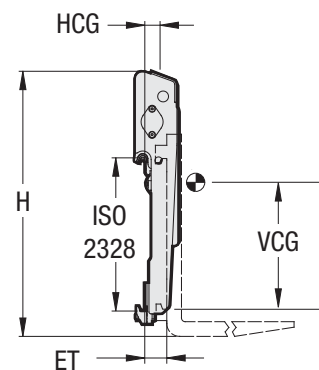

Catalogue Order No.	Capacity@ Load Centre kg@mm	Frame Width (mm) B	Overall Height (mm) H	Opening Range (mm) A	Fork Pocket Width (mm) W	Minimum Truck Carriage Width (mm) O	Total Sideshift Available (mm)	Effective Thickness (mm) ET	Horizontal Centre of Gravity (mm) HCG	Vertical Centre of Gravity (mm) VCG	Weight kg	Mounting Class ISO 2328	Visibility V
55G-FPS-A092	2500@500	920	720	340-810	130 ①	800	200	60	32	364	105	2	230
55G-FPS-A098	2500@500	980	720	340-870	130 ①	800	200	60	32	363	110	2	230
55G-FPS-A104	2500@500	1040	720	340-930	130 ①	860	200	60	32	362	115	2	230
55G-FPS-A110	2500@500	1100	720	340-990	130 ①	860	200	60	32	361	121	2	230
55G-FPS-A116	2500@500	1160	720	340-1050	130 ①	920	200	60	32	360	126	2	230
55G-FPS-A122	2500@500	1220	720	340-1110	130 ①	920	200	60	32	359	132	2	230
55G-FPS-A128	2500@500	1280	720	340-1170	130 ①	920	200	60	32	358	136	2	230
55G-FPS-A134	2500@500	1340	720	340-1230	130 ①	1020	200	60	32	357	142	2	230
55G-FPS-A140	2500@500	1400	720	340-1290	130 ①	1020	200	60	32	356	148	2	230
55G-FPS-A146	2500@500	1460	720	340-1350	130 ①	1040	200	60	32	355	153	2	230
100G-FPS-B105	5000@500	1050	855	380-920	150 ②	980	200	73	44	382	187	3	268
100G-FPS-B111	5000@500	1110	855	380-980	150 ②	980	200	73	44	383	193	3	268
100G-FPS-B117	5000@500	1170	855	380-1040	150 ②	980	200	73	44	384	198	3	268
100G-FPS-B123	5000@500	1230	855	380-1100	150 ②	980	200	73	44	385	204	3	268
100G-FPS-B129	5000@500	1290	855	380-1160	150 ②	980	200	73	44	386	209	3	268
100G-FPS-B135	5000@500	1350	855	380-1220	150 ②	980	200	73	44	387	220	3	268
100G-FPS-B141	5000@500	1410	855	380-1280	150 ②	1080	200	73	44	388	227	3	268
100G-FPS-B147	5000@500	1470	855	380-1340	150 ②	1080	200	73	44	389	233	3	268
100G-FPS-B153	5000@500	1530	855	380-1400	150 ②	1180	200	73	44	390	239	3	268
100G-FPS-B159	5000@500	1590	855	380-1460	150 ②	1280	200	73	44	391	245	3	268
100G-FPS-B165	5000@500	1650	855	380-1520	150 ②	1280	200	73	44	392	251	3	268
100G-FPS-B195	5000@500	1950	855	380-1820	150 ②	1580	200	73	44	397	280	3	268

- ① 55G: Adjustable to 125, 120, 100, 80 mm wide forks.
Opening Range OTO does not change.
- ② 100G: Adjustable to 140, 125, 120, 100 mm wide forks.
Opening Range OTO does not change.

- ▶ Non-Sideshifting units also available, no deduction.
- ▶ Maximum fork lengths 1500 mm. For longer fork lengths use fork positioner model PFP/PFS.
- ▶ Special frame widths and opening ranges.
- ▶ Uses standard ISO lift truck forks.
- ▶ Forks are not included.
- ▶ External sideshift with a double acting center mounted sideshift cylinder provides constant 100 mm sideshift at all fork positions.
- ▶ **DO NOT USE TO CLAMP LOADS.**