


MECHANICAL DRUM CLAMPS




Transport Drum with Ease and Efficiency



03A-DLP-F-0100

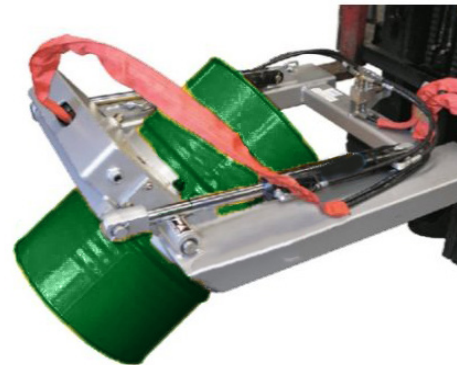


10A-DLH-F-0100

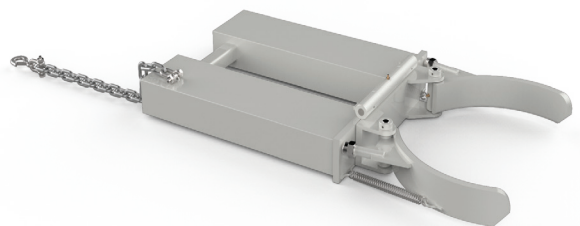

05A-MDC-F-0100



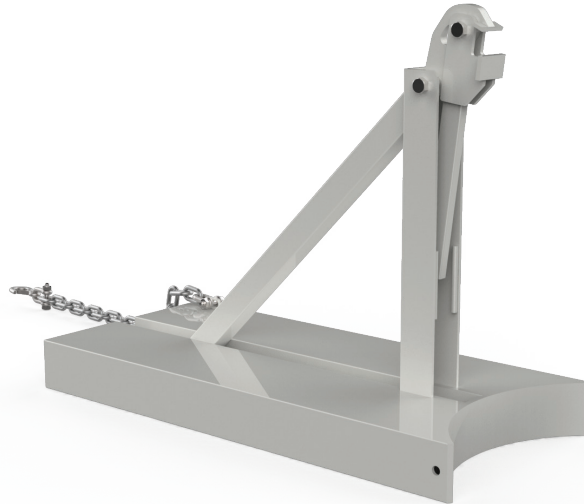


APPLICATIONS


Parrot Beak Drum Clamps are ideal for efficiently moving standard steel 205-litre drums. Reduces paint damage to drums and are particularly useful in difficult-to-access locations. Slips easily onto forks ensuring hassle-free handling from the driver's seat.

FEATURES & BENEFITS

- Pocket size to suit most fork section sizes.
- Zinc finish.
- Retaining chains and shackles included.
- Supplied with rating plate and user manual.
- 3-year warranty.

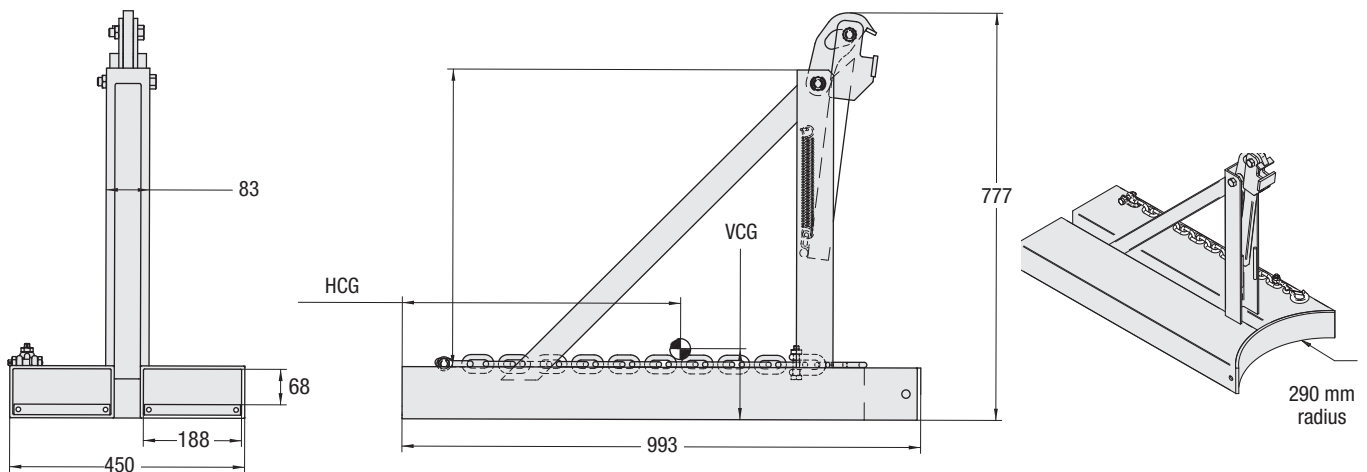

Catalogue Order No.	Capacity @ Load Ctr. (kg)	Overall Height (mm)	Overall Length (mm)	Overall Width (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Weight (kg)	Horizontal Ctr. of Gravity (mm) HCG	Vertical Ctr. of Gravity (mm) VCG
03A-DLP-F-0100	300@1210mm	777	993	450	188 x 68	250	73	533	136

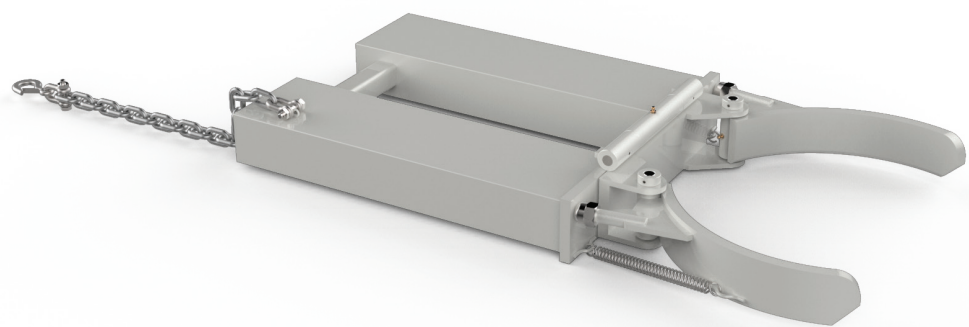


APPLICATIONS


Easily move one standard steel 205-litre drum. Drum clamps slip onto the forks with ease and ensure that drums are handled ergonomically and hassle-free from the driver's seat, improving stability during braking and cornering.

FEATURES & BENEFITS

- Pocket size to suit most fork section sizes.
- Retaining chains and shackles included.
- Adjustable pivot arm to suit various drum sizes and secure clamping.
- Supplied with rating plate and user manual.
- 3-year warranty.

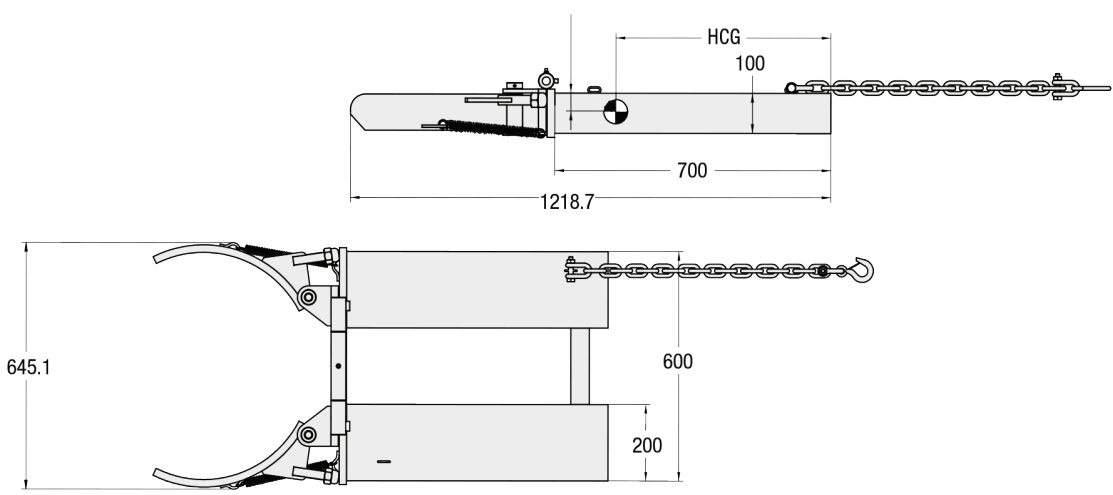

Catalogue Order Number	Capacity @ Load Ctr. (kg)	Overall Length (mm)	Overall Width (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	weight (kg)	Horizontal Center of Gravity (mm)	Vertical Ctr. of Gravity (mm)
05A-MDC-F-0100	500@1340mm	1209	646	180 x 80	400	86	545	-44

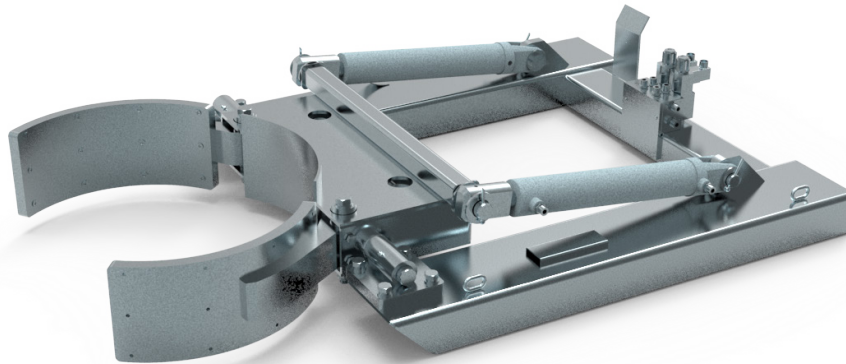

APPLICATIONS

This Hydraulic Drum Tipper is designed to tip 205-litre Drums. With 1 tonne lift capacity, this attachment is ideal for the recycling industry and for mining applications. This lifter is able to pick a single drum from a pallet of 4 without disturbing the other 3 drums and decant the contents from the operator's seat. This unit is fitted with quick connect couplings for connection to the 3rd and 4th Forklift hydraulic valves.

The standard finish on this attachment is galvanized. 3-year warranty.

<i>Catalogue Order Number</i>	<i>Capacity @ Load Ctr. (kg)</i>	<i>Overall Length (mm)</i>	<i>Overall Width (mm)</i>	<i>Tipping Rotation (degrees)</i>	<i>Fork Pocket Size (mm)</i>	<i>Fork Pocket Centres (mm)</i>	<i>Weight</i>	<i>Horizontal Center of Gravity (mm)</i>	<i>Vertical Ctr. of Gravity (mm)</i>
10A-DLH-F-0100	1000@1340mm	1589	1074	135	188 x 68	874	226	791	25