


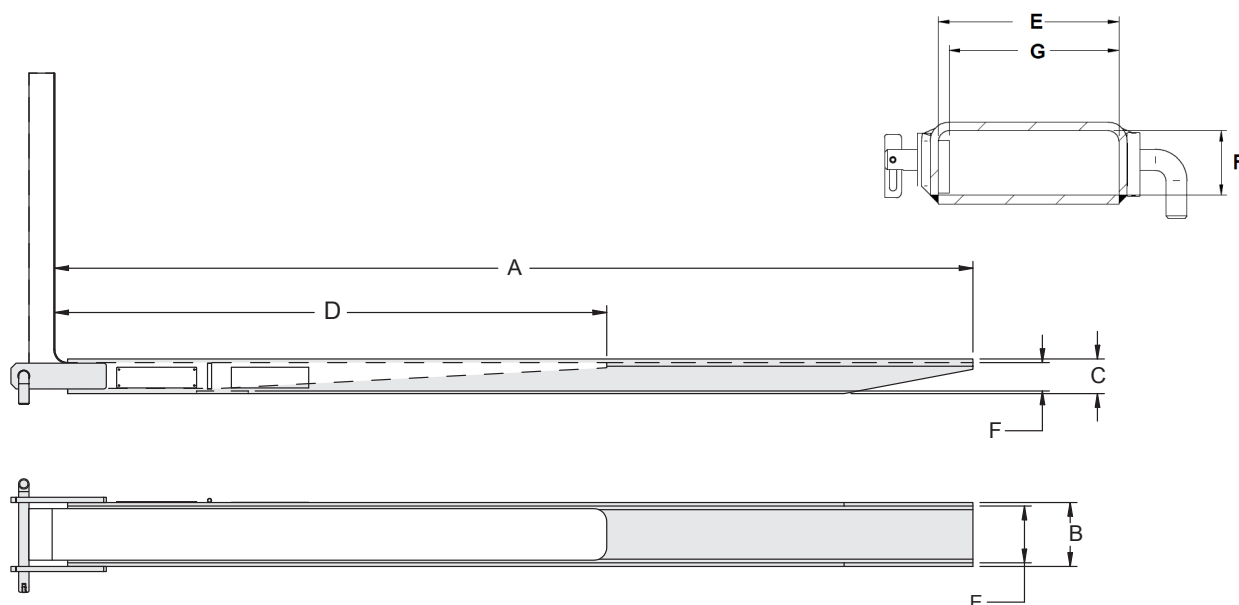

Catalogue Order No.	Capacity @ 600mm LC ① (kg)	Length (mm) A	Overall Width (mm) B	Overall Depth (mm) C	Min Fork Length (mm) D	Internal Width (mm) G	Max. Internal Width (mm) E	Internal Depth (mm) F	Max Fork Size (mm)	Weight per Pair (kg)	Horizontal Center of Gravity (mm)	Vertical Center of Gravity (mm)
30A-FEC-F-0100	3000	1580	122	63	960	110	110	51	100 X 45	49	715	-30
30A-FEC-F-0125	3000	1780	122	63	1070	110	110	51	100 X 45	55	815	-31
30A-FEC-F-0150	3000	2030	122	63	1220	110	110	51	100 X 45	63	940	-31
30A-FEC-F-0175	3000	2280	122	63	1370	110	110	51	100 X 45	71	1064	-31
30A-FEC-F-0200	3000	2530	122	63	1520	110	110	51	100 X 45	79	1189	-31
47A-FEC-F-0100	4750	1580	155	71	960	135	143	61	130 X 50	64	699	-28
47A-FEC-F-0125	4750	1780	155	71	1070	135	143	61	130 X 50	72	792	-28
47A-FEC-F-0150	4750	2030	155	71	1220	135	143	61	130 X 50	82	921	-28
47A-FEC-F-0175	4750	2280	155	71	1370	135	143	61	130 X 50	92	1044	-29
47A-FEC-F-0200	4750	2530	155	71	1520	135	143	61	130 X 50	102	1168	-29
47A-FEC-F-0225	4750	3050	155	71	1830	135	143	61	130 X 50	122	1427	-29
65A-FEC-F-0100	6500	1580	186	77	960	160	170	61	160 X 55	97	722	-29
65A-FEC-F-0125	6500	1780	186	77	1070	160	170	61	160 X 55	109	821	-29
65A-FEC-F-0150	6500	2030	186	77	1220	160	170	61	160 X 55	124	945	-29
65A-FEC-F-0175	6500	2280	186	77	1370	160	170	61	160 X 55	140	1070	-30
65A-FEC-F-0200	6500	2530	186	77	1520	160	170	61	160 X 55	154	1194	-30
65A-FEC-F-0225	6500	3050	186	77	1830	160	170	61	160 X 55	184	1453	-30
95A-FEC-F-0125	9500	1780	196	87	1070	165	180	71	170 X 65	120	808	-34
95A-FEC-F-0150	9500	2030	196	87	1220	165	180	71	170 X 65	136	931	-34
95A-FEC-F-0175	9500	2280	196	87	1370	165	180	71	170 X 65	152	1055	-34
95A-FEC-F-0200	9500	2530	196	87	1520	165	180	71	170 X 65	168	1180	-35
95A-FEC-F-0200	9500	3050	196	87	1830	165	180	71	170 X 65	202	1438	-35

① Capacity is calculated using max fork dimensions and may be less than the truck / fork tyne / fork extension combination. Australian Standards stipulate alternate truck nameplate ratings where fork extensions are used. Consult the lift truck manufacturer.