




FORK EXTENSIONS



Quickly and Easily Add Greater Flexibility to your Lift Truck Fleet.

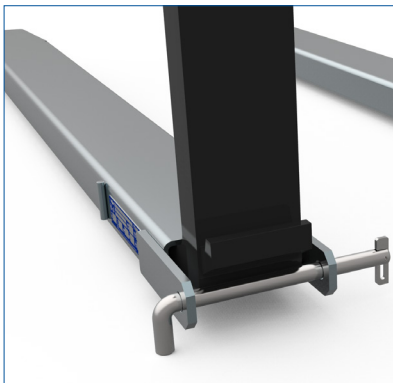

Easy use locking pins



Slim profile design



Clearly marked rating plate

APPLICATIONS

Add length to standard fork tynes to quickly and efficiently increase the usable length of your forks. Improves load stability when handling longer loads and allows drivers to more easily access centrally located freight on transport vehicles.


Designed in accordance with the Australian Standards to provide peace of mind.



FEATURES

- Easy to use locking pins.
- Zinc plated finish.
- Capacity to match lift truck capacities.
- Clearly marked rating plate.
- 3-year warranty.

Note: All lift truck attachments affect the safe working load of a lift truck. End users should consult with their lift truck supplier to ensure that the lift truck is rated for use with these attachments.

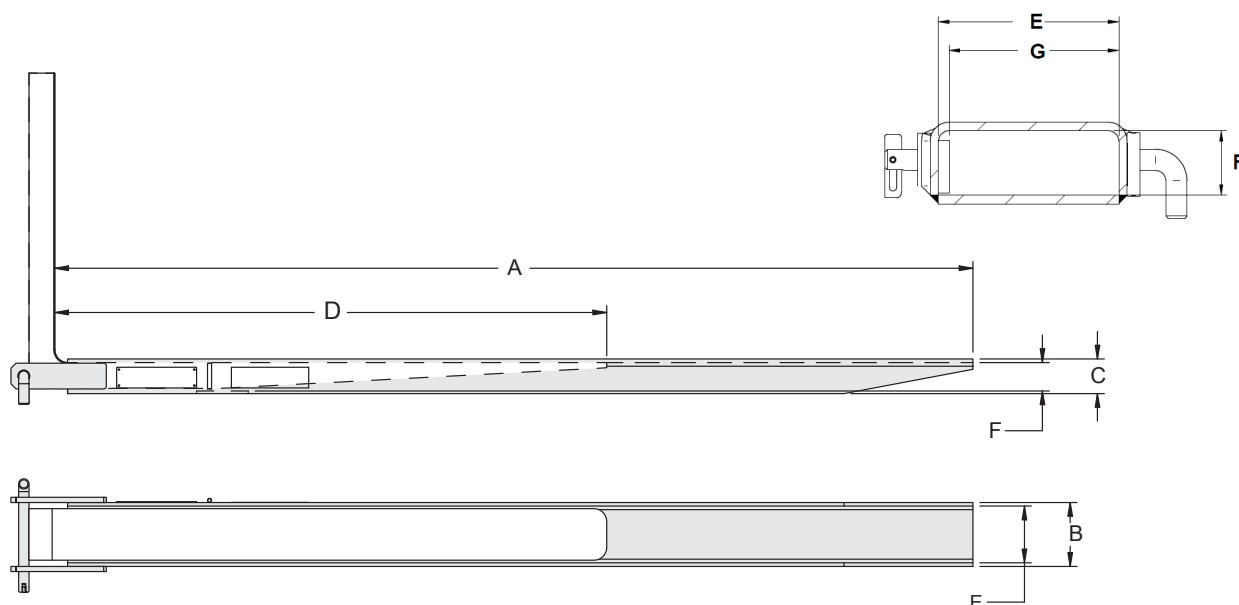

Catalogue Order No.	Capacity @ 600mm LC ① (kg)	Length (mm) A	Overall Width (mm) B	Overall Depth (mm) C	Min Fork Length (mm) D	Internal Width (mm) G	Max. Internal Width (mm) E	Internal Depth (mm) F	Max Fork Size (mm)	Weight per Pair (kg)	Horizontal Center of Gravity (mm)	Vertical Center of Gravity (mm)
30A-FEC-F-0100	3000	1580	122	63	960	110	110	51	100 X 45	49	715	-30
30A-FEC-F-0125	3000	1780	122	63	1070	110	110	51	100 X 45	55	815	-31
30A-FEC-F-0150	3000	2030	122	63	1220	110	110	51	100 X 45	63	940	-31
30A-FEC-F-0175	3000	2280	122	63	1370	110	110	51	100 X 45	71	1064	-31
30A-FEC-F-0200	3000	2530	122	63	1520	110	110	51	100 X 45	79	1189	-31
47A-FEC-F-0100	4750	1580	155	71	960	135	143	61	130 X 50	64	699	-28
47A-FEC-F-0125	4750	1780	155	71	1070	135	143	61	130 X 50	72	792	-28
47A-FEC-F-0150	4750	2030	155	71	1220	135	143	61	130 X 50	82	921	-28
47A-FEC-F-0175	4750	2280	155	71	1370	135	143	61	130 X 50	92	1044	-29
47A-FEC-F-0200	4750	2530	155	71	1520	135	143	61	130 X 50	102	1168	-29
47A-FEC-F-0225	4750	3050	155	71	1830	135	143	61	130 X 50	122	1427	-29
65A-FEC-F-0100	6500	1580	186	77	960	160	170	61	160 X 55	97	722	-29
65A-FEC-F-0125	6500	1780	186	77	1070	160	170	61	160 X 55	109	821	-29
65A-FEC-F-0150	6500	2030	186	77	1220	160	170	61	160 X 55	124	945	-29
65A-FEC-F-0175	6500	2280	186	77	1370	160	170	61	160 X 55	140	1070	-30
65A-FEC-F-0200	6500	2530	186	77	1520	160	170	61	160 X 55	154	1194	-30
65A-FEC-F-0225	6500	3050	186	77	1830	160	170	61	160 X 55	184	1453	-30
95A-FEC-F-0125	9500	1780	196	87	1070	165	180	71	170 X 65	120	808	-34
95A-FEC-F-0150	9500	2030	196	87	1220	165	180	71	170 X 65	136	931	-34
95A-FEC-F-0175	9500	2280	196	87	1370	165	180	71	170 X 65	152	1055	-34
95A-FEC-F-0200	9500	2530	196	87	1520	165	180	71	170 X 65	168	1180	-35
95A-FEC-F-0200	9500	3050	196	87	1830	165	180	71	170 X 65	202	1438	-35

① Capacity is calculated using max fork dimensions and may be less than the truck / fork tyne / fork extension combination. Australian Standards stipulate alternate truck nameplate ratings where fork extensions are used. Consult the lift truck manufacturer.