



*A smooth operating
fork positioner
designed to
increase
productivity,
improve safety
and decrease
product damage.*



The fork positioner for warehousing and distribution centres.

APPLICATIONS

The A-Series fork positioner is designed for distribution, warehousing and manufacturing operations. This high visibility fork positioner allows the operator to accurately position the forks without leaving the driver's seat. Zero lost load makes it ideal for lift trucks with integral sideshifts wanting to gain maximum available capacity.

FEATURES



- No weld installation
- Excellent driver visibility
- Pressure relief valves included in centre manifold. Ideal for applications where a low height load backrest is required
- Heavy duty cast pockets
- Completely serviceable cylinders
- Self-lubricating UHMW bearings

OPTIONS


- Sideshifting
- Custom load backrest heights
- Sacrificial load backrest for container stuffing
- Custom widths
- Bronze sideshift slides
- Bronze lower sideshift hooks



Cascade Australia 1445 Ipswich Road Rocklea. Qld. Australia, 4106 - 1800 Cascade ■ (free call 1800 227 223) ■ FAX 1800 227 224

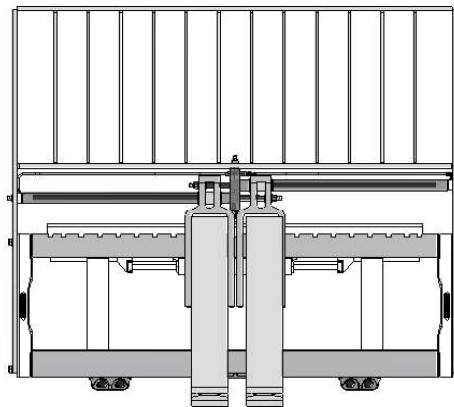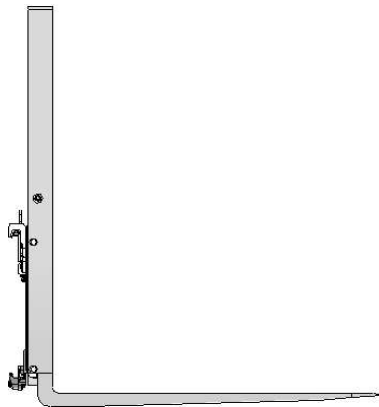

Catalog Order No.	Capacity @ 600 mm Load Center kg	Carriage Width (mm) A	Opening Range ITO	Fork Pocket Width mm	Mtg. Class	Min. Truck Carriage Width mm	Weight kg	Effective Thickness (mm) ET	Horizontal Ctr. of Gravity (mm) HCG	Vertical Ctr. of Gravity (mm) VCG	Total Sideshift mm	Overall Height (mm) C
Cascade												
55A-FPS-A0700	2500	700	100 - 630	100 - 125	II	655	128	58	48	448	200	1150
55A-FPS-A0920	2500	940	100 - 870	100 - 125	II	785	128	58	48	448	200	1150
55A-FPS-A0965	2500	965	100 - 895	100 - 125	II	895	128	58	48	448	200	1150
55A-FPS-A1000	2500	1000	100 - 930	100 - 125	II	895	134	58	48	449	200	1150
55A-FPS-A1020	2500	1020	100 - 950	100 - 125	II	895	134	58	48	449	200	1150
55A-FPS-A1039	2500	1039	100 - 969	100 - 125	II	895	134	58	48	449	200	1150
55A-FPS-A1151	2500	1151	100 - 1001	100 - 125	II	1040	154	58	46	444	200	1150
55A-FPS-A1170	2500	1170	100 - 1100	100 - 125	II	1040	154	58	46	444	200	1150
55A-FPS-A1260	2500	1260	100 - 1190	100 - 125	II	1040	154	58	46	444	200	1150
55A-FPS-A1470	2500	1470	100 - 1400	100 - 125	II	1240	184	58	46	439	200	1150
55A-FPS-A1600	2500	1600	100 - 1450	100 - 125	II	1319	184	58	46	439	200	1150
65A-FPS-B0920	3000	940	100 - 870	125 - 150	III	870	152	64	50	490	200	1240
65A-FPS-B0965	3000	965	100 - 895	125 - 150	III	870	154	64	50	490	200	1240
65A-FPS-B1000	3000	1000	100 - 930	125 - 150	III	870	156	64	50	490	200	1240
65A-FPS-B1039	3000	1039	100 - 969	125 - 150	III	935	160	64	50	490	200	1240
65A-FPS-B1059	3000	1059	100 - 989	125 - 150	III	932	162	64	50	490	200	1240
65A-FPS-B1067	3000	1067	100 - 917	125 - 150	III	932	163	64	50	490	200	1240
65A-FPS-B1070	3000	1070	100 - 1000	125 - 150	III	933	163	64	50	490	200	1240
65A-FPS-B1100	3000	1100	100 - 1030	125 - 150	III	933	165	64	50	490	200	1240
65A-FPS-B1151	3000	1151	100 - 1001	125 - 150	III	1034	168	64	50	490	200	1240
65A-FPS-B1170	3000	1170	100 - 1100	125 - 150	III	1034	169	64	50	490	200	1240
65A-FPS-B1260	3000	1260	100 - 1190	125 - 150	III	1034	190	64	50	490	200	1240
65A-FPS-B1300	3000	1300	100 - 1150	125 - 150	III	1034	188	64	50	490	200	1240
65A-FPS-B1470	3000	1470	100 - 1400	125 - 150	III	1215	199	64	50	475	200	1240
65A-FPS-B1600	3000	1600	100 - 1450	125 - 150	III	1370	230	64	50	475	200	1240
100A-FPS-B1070	4600	1070	100 - 1000	125 - 150	III	935	225	76	55	455	200	1240
100A-FPS-B1170	4600	1170	100 - 1100	125 - 150	III	965	244	76	55	455	200	1240
100A-FPS-B1300	4600	1300	100 - 1230	125 - 150	III	1080	244	76	55	455	200	1240
100A-FPS-B1580	4600	1580	100 - 1510	125 - 150	III	1170	298	76	55	445	200	1240
100A-FPS-B1800	4600	1800	100 - 1730	125 - 150	III	1310	337	76	55	445	200	1240
100A-FPS-B2000	4600	2000	100 - 1930	125 - 150	III	1510	357	76	55	445	200	1240
150A-FPS-C1170	7000	1170	100 - 1100	125 - 150	IV	1168	265	80	55	550	300	1430
150A-FPS-C1300	7000	1300	100 - 1230	125 - 150	IV	1168	266	80	55	550	300	1430
150A-FPS-C1525	7000	1525	100 - 1455	125 - 150	IV	1200	350	80	55	545	300	1430
150A-FPS-C1700	7000	1700	100 - 1630	125 - 150	IV	1524	405	80	55	550	300	1430
150A-FPS-C1900	7000	1900	100 - 1830	125 - 150	IV	1600	406	80	55	550	300	1430
150A-FPS-C2200	7000	2200	100 - 2130	125 - 150	IV	1900	488	80	55	550	300	1430
150A-FPS-C2400	7000	2400	100 - 2330	125 - 150	IV	2082	479	80	55	550	300	1430
165A-FPS-4-C2400	8000	2400	100 - 2330	125 - 150	IV	1700	634	102	73	446	200	1470

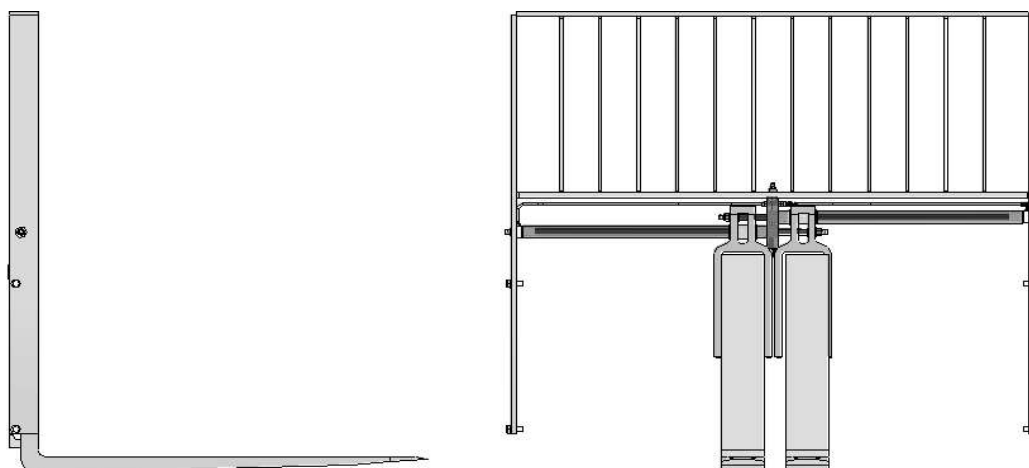

Catalog Order No.	Capacity @ 600 mm Load Center	Carriage Width (mm)	Opening Range	Fork Pocket Width	Mtg. Class	Weight	Effective Thickness (mm)	Horizontal Ctr. of Gravity (mm)	Vertical Ctr. of Gravity (mm)	Overall Height (mm)
	kg	A	ITO	mm		kg	ET	HCG	VCG	C
Cascade										
55A-FPB-A1245	2500	1245	100 - 1175	100 - 125	II	85	0	30	620	1150
55A-FPB-A1020	2500	1020	100 - 950	100 - 125	II	78	0	30	605	1150
55A-FPB-A0920	2500	920	100 - 850	100 - 125	II	75	0	30	600	1150
65A-FPB-B1040	4500	1040	100 - 971	125 - 150	III	85	0	30	700	1240
65A-FPB-B1245	4500	1245	100 - 1175	125 - 150	III	92	0	30	710	1240
65A-FPB-B1550	4500	1550	100 - 1479	125 - 150	III	102	0	30	725	1240
100A-FPB-B1070	4600	1070	100 - 1000	125 - 150	III	86	0	30	700	1240
100A-FPB-B1170	4600	1170	100 - 1101	125 - 150	III	91	0	30	710	1240
100A-FPB-B1525	4600	1525	100 - 1330	125 - 150	III	103	0	30	725	1240
100A-FPB-B1800	4600	1800	100 - 1759	125 - 150	III	112	0	30	735	1240
120A-FPB-C1200	8000	1200	100 - 1095	125 - 150	IV	94	0	30	805	1430
120A-FPB-C1550	8000	1550	100 - 1399	125 - 150	IV	106	0	30	825	1430
120A-FPB-C1800	8000	1800	100 - 1730	125 - 150	IV	115	0	30	855	1430
150A-FPB-C1245	8000	1245	100 - 1175	125 - 150	IV	94	0	30	805	1430
150A-FPB-C1500	8000	1500	100 - 1479	125 - 150	IV	106	0	30	825	1430
150A-FPB-C1830	8000	1830	100 - 1759	125 - 150	IV	115	0	30	855	1430
150A-FPB-C2400	8000	2400	100 - 2250	125 - 150	IV	134	0	30	855	1430

- ▶ Forks are not included with attachment.
- ▶ Fork installation does not require welding, drilling or tapping.
- ▶ **DO NOT USE TO CLAMP LOADS.**