



The complete weighing solution that maximizes capacity,
saves time and improves maneuverability

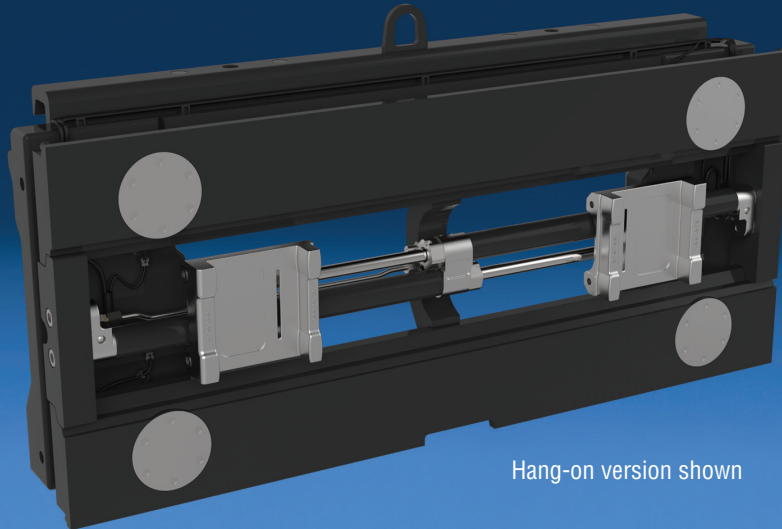

Hang-on version shown



Excellent visibility window helps improve operator efficiency



Weighing, Sideshifting & Fork Positioning combined within a single unit. Allows for easy installation and connection



Cascade ActivWeigh carriage and sideshifting units accept most Cascade attachments on the front



Start transporting immediately and weight data is automatically recording



Display Indicator with bright backlit display and independent communication

APPLICATIONS

The first of its kind – Cascade ActivWeigh™. One innovative attachment with the power of three. A combined Weighing Carriage, Sideshifter and Fork Positioner provide multiple operational benefits into one sleek patented design. Don't need all three? The ActivWeigh carriage model is available singularly with Sideshifting or Fork Positioning as additional options. Weigh-in-motion increases productivity and efficiency. Common uses include incoming goods control, overload prevention, dosing, filling, waste management, order picking and inventory control.



OPTIONS

- Truck powered display available.
- Truck powered carriage available.
- Thermal and dot matrix printers.
- Data transfer output devices, including:
 - RS232.
 - Wireless Bluetooth®
 - WLAN (Wi-Fi)
- Hang-on or Integral versions available.
- Forks not included with unit. Consult Cascade for fork lengths.



FEATURES

- Quick installation and set up.
- Digital calibration for fast and easy adjustments.
- Two rechargeable batteries.
- Bright backlit LCD driver display with rechargeable batteries.
- Manual and automatic zero correction.
- Gross/Net weighing.
- Automatic push button tare.
- Automatic low voltage shut off.
- Manual tare entry totaling with sequence number.
- Displays both kg and lb units.
- 5-digit ID code entry.
- Piece counting by sampling or manual piece weight entry.
- Error indicator.
- Internal clock.
- All-In-One patented, clean and sleek design.
- Proven K-Series Fork Positioner with common components provides greater reliability.

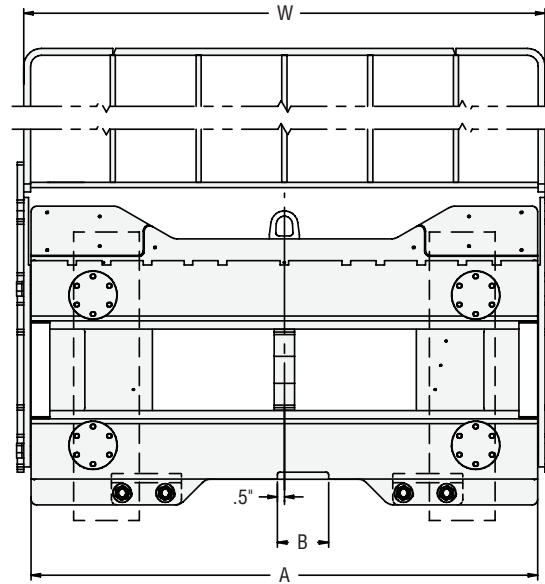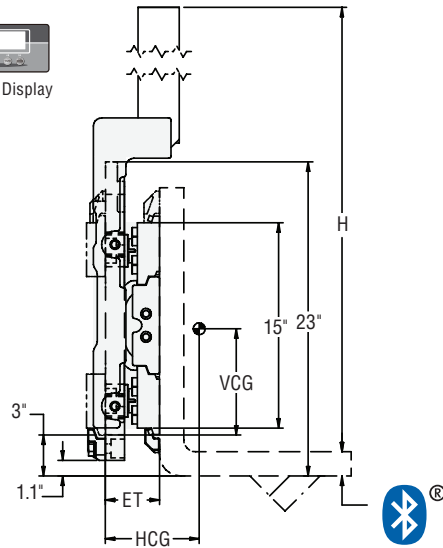



Hang-On

Catalog Order No.	Capacity@ 24" (600 mm) Load Center		Frame Width	Minimum Truck Carriage Width	Fork Loading Slot	Load Backrest Height	Load Backrest Width	Weight	Mtg. Class	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness
	lbs	kg	A	in	B	H	W	lbs		HCG	VCG	ET
Non-Legal For Trade Approved: 0-2,000 lb with 2 lb display graduation; 2,001-5,500 lb with 5 lb display graduation - with 48" high load backrest												
25A-WCH-2A-0001	5,500	2,500	37.0"	35.2"	3.7"	48"	38"	442	II	2.3"	12.5"	3.9"
25A-WCH-2A-0002	5,500	2,500	40.2"	35.2"	3.7"	48"	41"	473	II	2.3"	12.6"	3.9"
25A-WCH-2A-0003	5,500	2,500	40.9"	35.2"	3.7"	48"	42"	480	II	2.3"	12.6"	3.9"
25A-WCH-2A-0004	5,500	2,500	42.0"	38.4"	3.7"	48"	43"	486	II	2.3"	12.6"	3.9"
Non-Legal For Trade Approved: 0-2,000 lb with 2 lb display graduation; 2,001-6,500 lb with 5 lb display graduation - with 48" high load backrest												
30A-WCH-3A-0002	6,500	3,000	37.0"	34.3"	4.7"	48"	38"	521	3A	2.1"	14.3"	3.9"
30A-WCH-3A-0001	6,500	3,000	38.2"	34.3"	4.7"	48"	39"	537	3A	2.1"	14.4"	3.9"
30A-WCH-3A-0003	6,500	3,000	40.4"	34.3"	4.7"	48"	41"	559	3A	2.1"	14.3"	3.9"
30A-WCH-3A-0004	6,500	3,000	40.9"	36.8"	4.7"	48"	42"	561	3A	2.1"	14.3"	3.9"
30A-WCH-3A-0005	6,500	3,000	42.0"	36.8"	4.7"	48"	43"	570	3A	2.1"	14.3"	3.9"

- ▶ Contact Cascade for Weigh in Motion models.
- ▶ System is capable of accuracy within .1% of actual load weight. However, due to the display graduation limitations, the display may yield results outside the .1% range. Consult Cascade for details.
- ▶ Non-Legal For Trade models limited to 72" fork length.
- ▶ Non-Legal For Trade models fork spacing maximum 49" OTO.
- ▶ Load length can not exceed the length of the fork by more than 6".
- ▶ Forks are not included with attachment.
- ▶ Integral versions available, contact Cascade.
- ▶ ActivWeigh units ship with battery powered driver display and mounting bracket.
- ▶ Truck powered display (12V-100V) is available.
- ▶ Charger and two rechargeable scale batteries included.
- ▶ The piece counting feature is not Legal For Trade approved.
- ▶ Optimal temperature range is 15°F - 105°F.
- ▶ Ingress protection IP65. Do not pressure wash.



Driver Display

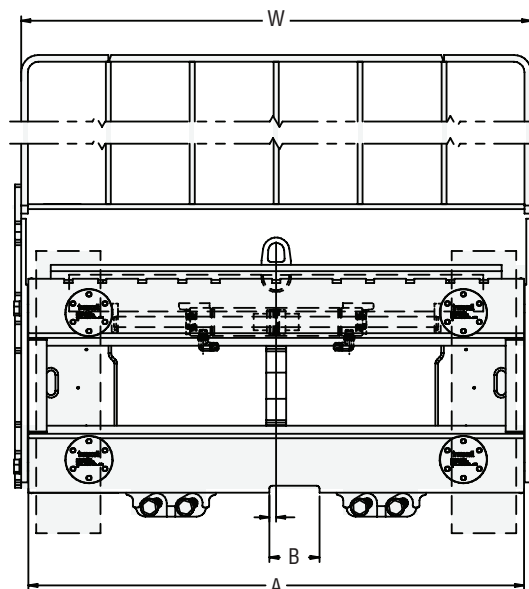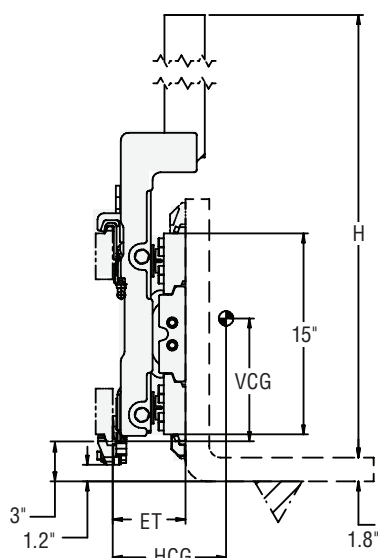



Hang-On

Catalog Order No.	Capacity@ 24" (600 mm) Load Center		Frame Width	Minimum Truck Carriage Width	Total Sideshift Available	Fork Loading Slot	Load Backrest Height	Load Backrest Width	Weight	Mtg. Class	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness
	lbs	kg	A	in	in	B	H	W	lbs		HCG	VCG	ET
Non-Legal For Trade Approved: 0-2,000 lb with 2 lb display graduation; 2,001-5,500 lb with 5 lb display graduation - with 48" high load backrest													
25A-WHS-2A-0001	5,500	2,500	37.0"	35.2"	8.0"	3.7"	48"	38"	455	II	3.1"	12.3"	5.4"
25A-WHS-2A-0002	5,500	2,500	40.2"	35.2"	8.0"	3.7"	48"	41"	488	II	3.1"	12.4"	5.4"
25A-WHS-2A-0003	5,500	2,500	40.9"	35.2"	8.0"	3.7"	48"	42"	493	II	3.1"	12.3"	5.4"
25A-WHS-2A-0004	5,500	2,500	42.0"	38.4"	8.0"	3.7"	48"	43"	502	II	3.1"	12.3"	5.4"
Non-Legal For Trade Approved: 0-2,000 lb with 2 lb display graduation; 2,001-6,500 lb with 5 lb display graduation - with 48" high load backrest													
30A-WHS-3A-0002	6,500	3,000	37.0"	34.3"	8.0"	4.7"	48"	38"	510	III	3.0"	14.5"	5.4"
30A-WHS-3A-0001	6,500	3,000	38.2"	34.3"	8.0"	4.7"	48"	39"	521	III	3.0"	14.7"	5.4"
30A-WHS-3A-0003	6,500	3,000	40.4"	34.3"	8.0"	4.7"	48"	41"	546	III	3.0"	14.6"	5.4"
30A-WHS-3A-0004	6,500	3,000	40.9"	36.8"	8.0"	4.7"	48"	42"	550	III	3.0"	14.6"	5.4"
30A-WHS-3A-0005	6,500	3,000	42.0"	36.8"	8.0"	4.7"	48"	43"	559	III	3.0"	14.5"	5.4"

- ▶ Contact Cascade for Weigh in Motion models.
- ▶ System is capable of accuracy within .1% of actual load weight. However, due to the display graduation limitations, the display may yield results outside the .1% range. Consult Cascade for details.
- ▶ Non-Legal For Trade models limited to 72" fork length.
- ▶ Non-Legal For Trade models fork spacing maximum 49" OTD.
- ▶ Load length can not exceed the length of the fork by more than 6".
- ▶ Forks are not included with attachment.
- ▶ Integral versions available, contact Cascade.
- ▶ ActivWeigh units ship with battery powered driver display and mounting bracket.
- ▶ Truck powered display (12V-100V) is available.
- ▶ Charger and two rechargeable scale batteries included.
- ▶ The piece counting feature is not Legal For Trade approved.
- ▶ Optimal temperature range is 15°F - 105°F.
- ▶ Ingress protection IP65. Do not pressure wash.



Driver Display

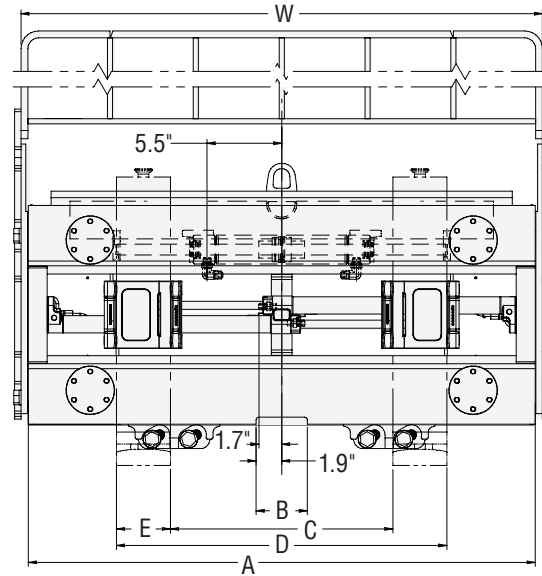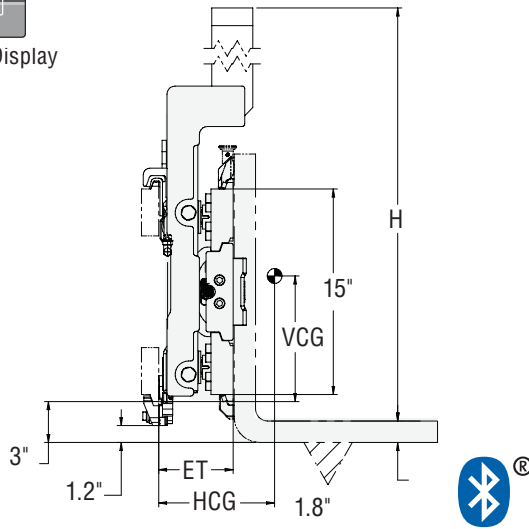

Hang-On

Catalog Order No.	Capacity@ 24" (600 mm) Load Center	Frame Width	Minimum Truck Carriage Width	Total Sideshift Available	Fork Loading Slot	Fork Pocket Width	Opening Range In To Out	Load Backrest Height	Load Backrest Width	Weight	Mtg. Class	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	
lbs	kg	A	in	in	B	E	C-D	H	W	lbs		HCG	VCG	ET	
Non-Legal For Trade Approved: 0-2,000 lb with 2 lb display graduation; 2,001-5,500 lb with 5 lb display graduation - with 48" high load backrest															
25A-WHF-2A-0001	5,500	2,500	37.0"	35.2"	8.0"	3.7"	4.0"	2" - 32"	48"	38"	480	II	3.2"	12.0"	5.4"
25A-WHF-2A-0002	5,500	2,500	40.2"	35.2"	8.0"	3.7"	4.0"	2" - 35"	48"	41"	513	II	3.2"	12.1"	5.4"
25A-WHF-2A-0003	5,500	2,500	40.9"	35.2"	8.0"	3.7"	4.0"	2" - 36"	48"	42"	519	II	3.2"	12.1"	5.4"
25A-WHF-2A-0004	5,500	2,500	42.0"	38.4"	8.0"	3.7"	4.0"	2" - 37"	48"	43"	528	II	3.2"	12.0"	5.4"
Non-Legal For Trade Approved: 0-2,000 lb with 2 lb display graduation; 2,001-6,500 lb with 5 lb display graduation - with 48" high load backrest															
30A-WHF-3A-0002	6,500	3,000	37.0"	34.3"	8.0"	4.7"	5.0"	2" - 32"	48"	38.1	532	III	3.1"	14.3"	5.4"
30A-WHF-3A-0001	6,500	3,000	38.2"	34.3"	8.0"	4.7"	5.0"	2" - 33"	48"	39.0"	550	III	3.1"	14.4"	5.4"
30A-WHF-3A-0003	6,500	3,000	40.4"	34.3"	8.0"	4.7"	5.0"	2" - 35"	48"	41.4	568	III	3.1"	14.4"	5.4"
30A-WHF-3A-0004	6,500	3,000	40.9"	36.8"	8.0"	4.7"	5.0"	2" - 36"	48"	42.0"	574	III	3.1"	14.4"	5.4"
30A-WHF-3A-0005	6,500	3,000	42.0"	36.8"	8.0"	4.7"	5.0"	2" - 37"	48"	43.1"	583	III	3.1"	14.3"	5.4"

- ▶ Contact Cascade for Weigh in Motion models.
- ▶ System is capable of accuracy within .1% of actual load weight. However, due to the display graduation limitations, the display may yield results outside the .1% range. Consult Cascade for details.
- ▶ Non-Legal For Trade models limited to 72" fork length.
- ▶ Non-Legal For Trade models fork spacing maximum 49" OTO.
- ▶ Load length can not exceed the length of the fork by more than 6".
- ▶ Forks are not included with attachment.
- ▶ Integral versions available, contact Cascade.
- ▶ ActivWeigh units ship with battery powered driver display and mounting bracket.
- ▶ Truck powered display (12V-100V) is available.
- ▶ Charger and two rechargeable scale batteries included.
- ▶ The piece counting feature is not Legal For Trade approved.
- ▶ Optimal temperature range is 15°F - 105°F.
- ▶ Ingress protection IP65. Do not pressure wash.