



Installation Instruction

Cascade Fork Extensions

A safe and dedicated area should be established for the installation of fork extensions. This area can also double as a storage area for the fork extensions when removed from the lift truck. All national and regional safety standards must be followed. All required safety equipment is to be used when performing this action (e.g., safety gloves, boots, etc.). Certified lift truck operators should undergo additional training for the use of fork extensions, with reference to ANSI/ITSDF B56.1-2005, Section 7.39.

INSTALLATION





The lift truck must conform to ANSI/ITSDF B56.1-2005, 5.2.11, when the driver leaves the operator position. **Exception to this is for the height of the forks off the ground.**

- 1 Park the lift truck on a flat and level surface, free of obstacles.
- 2 Position the forks no more than 1 in. (25 mm) above the ground.
- 3 Raise the extension tip to allow the fork blade to enter between the retaining strap and extension channel.

CAUTION: The fork extension should only be handled at the tip. Handling the extension in the shaded area will create pinch points when lowering onto the fork blade.

CAUTION: No person, including the installer should be standing close enough that a falling extension could strike them.

- 4 Slide the extension on the fork, keeping the tip at an angle. Slide on until the back of the fork extension contacts the fork heel.
- 5 Lower the extension onto the fork blade. The fork extension is held in place by the retaining strap around the back of the fork. The extension is now ready for use.

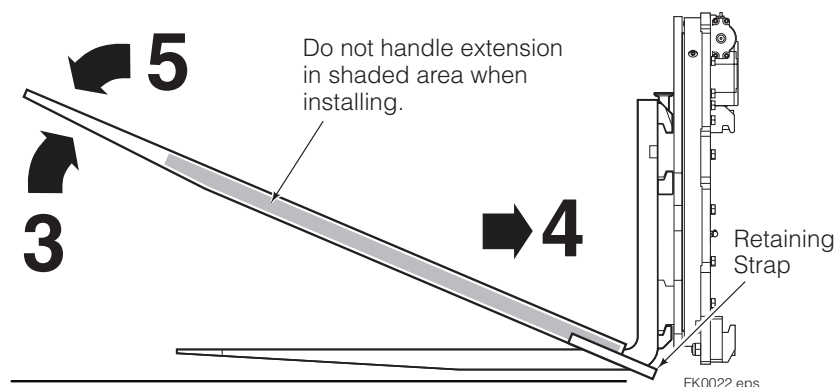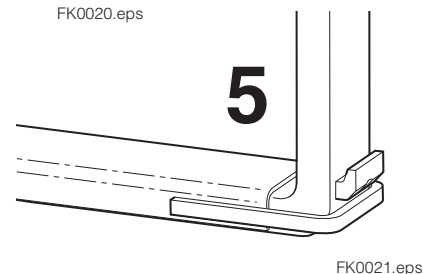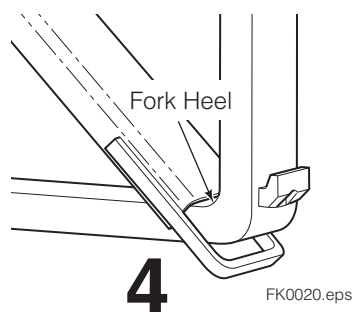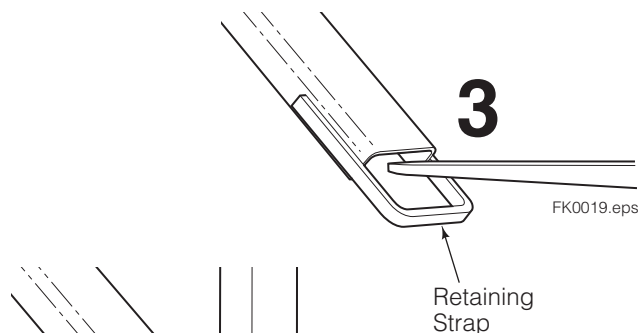

NOTE: This information should not be interpreted as the basis for warranty claims unless so designated.

cascade[®]
corporation

For Technical Support . . .

Call: 1-877-227-2233 Fax: 519-763-1473

Internet: www.cascorp.com

Write: Cascade Corporation, PO Box 1508, Guelph, ON, N1H 6N9, Canada

REMOVAL

- 1 Park the lift truck on a flat and level surface, free of obstacles.
- 2 Position the forks no more than 1 in. (25 mm) above the ground.
- 3 Lift the tip of the fork extension until the retaining strap is below the level of the fork blade.

CAUTION: The fork extension should only be handled at the tip. Handling the extension in the shaded area will create pinch points when lowered onto the fork blade.

CAUTION: No person, including the person removing the extension should be standing close enough that a falling extension could strike them.

- 4 Pull the extension towards you until the retaining strap is beyond the tip of the fork.
- 5 Place the fork extension in a designated location that is safe and not accessible to unauthorized persons, especially if stored on a job-site.

NOTE: It is recommended that the method you use to install the fork extensions be certified by your safety officer or safety committee, and that the relevant training be given to the lift truck operator. The intent is for the fork extension to stay fully controlled while being installed, removed or stored.

Fork extensions are intended to carry uniform loads no longer than the extension length. Fork extensions must never be tip loaded.

