


Cascade offers a number of fork mounted jib cranes that quickly convert a lift truck into a mobile crane to easily move non-palletised product. A variety of Jib Crane models for practically any application to increase lift truck versatility. Models include Multi-Angled, Flat, Slip-On, or Carriage-Mounted, allowing for effective slinging of loads beneath a hook.

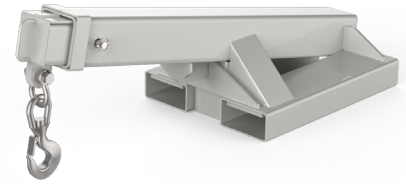

FEATURES & BENEFITS


- Multiple load positions via a telescoping boom.
- Multi-angle option allows extra height and load capacity and is easy to set using the 4-stage locking pin.
- Designed in accordance with AS2359.
- Zinc-plated finish.
- Capacity rated hooks and swivel included.
- Supplied with rating plate and user manual.
- Easy locking pins or chains to secure attachment to the lift truck.
- Wide variety of models options available.

Note: All lift truck attachments affect the safe working load of a lift truck. End users should consult their lift truck supplier to ensure the lift truck is rated for use with these attachments. In the case of a slung load when lifting a jib attachment, the net lifting capacity should be 0.8 times the rating of the lift truck to allow for the swinging load. Please consult your local lift truck.

Catalogue Order Number	Capacity	Overall Height (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Overall Length Retracted (mm)	Maximum Reach Ext (mm)	Weight (kg)	H.C Of G. (mm)	V.C of G. (mm)
25A-JBE-F-0100 Non Tilt Long	Refer to Capacity Chart	511	184x60	300	2176	3520	180	847	160
25A-JBE-F-0125 Non Tilt Short	Refer to Capacity Chart	475	184x60	300	1366	1975	135	533	121
45A-JBE-F-0100 Non Tilt Long	Refer to Capacity Chart	541	180x65	300	2146	3520	275	845	197
45A-JBE-F-0125 Non Tilt Short	Refer to Capacity Chart	541	180x65	300	1366	1990	189	519	171
45A-JBE-F- 0175 Non Tilt Short Low	Refer to Capacity Chart	240	184x60	290	1296	1925	116	500	66
45A-JBE-F-0150 Non Tilt Long Low	Refer to Capacity Chart	240	184x60	290	2171	3520	167	810	17
50A-JBE-F-0100 Non Tilt Long	Refer to Capacity Chart	541	180x65	0	2146	3520	275	845	197
25A-JBA-F-0100 Tilting Long	Refer to Capacity Chart	606	184x60	346	2222	3580	227	727	232
25A-JBA-F-0125 Tilting Short	Refer to Capacity Chart	606	184x60	346	1422	2030	186	539	193
45A-JBA-F-0100 Tilting Long	Refer to Capacity Chart	648	180x65	362	2242	3590	328	783	242
50A-JBA-F-0100 Tilting Long	Refer to Capacity Chart	648	180x65	362	2242	3590	328	783	217
35A-JTF-F-0100 Fixed Tilt	Refer to Capacity Chart	516	184x68	300	1502	2395	117	645	83
47A-JTF-F-0100 Fixed Tilt	Refer to Capacity Chart	552	184x68	300	1506	2395	156	612	108

Capacity Chart (kg) @ Load Centre LC(mm)


Model Number	Hook Position							
	1	2	3	4	5	6	7	8
25A-JBE-F-0100 Non Tilt Long	2500@950	2300@1410	1900@1870	1650@2035	1250@2405	650@2780	450@3150	250@3520
25A-JBE-F-0125 Non Tilt Short	2500@815	1200@1230	900@1600	750@1975				
45A-JBE-F-0100 Non Tilt Long	4500@1060	4150@1520	3300@2040	2410@2450	2780@1300	3150@760	480@3520	
45A-JBE-F-0125 Non Tilt Short	4500@810	2400@1230	1610@1800	1500@1990				
45A-JBE-F- 0175 Non Tilt Short Low	4500@670	2900@1165	1300@1545	750@1925				
45A-JBE-F-0150 Non Tilt Long Low	4500@870	1650@2040	1250@2410	650@2780	450@3150	200@3520		
50A-JBE-F-0100 Non Tilt Long	4750@1060	4150@1520	3300@2040	2450@2410	1300@2780	760@3150	480@3520	
25A-JBA-F-0100 Tilting Long	2500@1005	2300@1465	1900@1925	1650@2090	1150@2460	660@2830	400@3200	250@3580
25A-JBA-F-0125 Tilting Short	2500@830	1800@1130	1200@1290	900@1660	750@2030			
45A-JBA-F-0100 Tilting Long	4500@1060	4150@1505	3700@1950	3300@2105	2500@2475	1300@2845	760@3220	480@3590
50A-JBA-F-0100 Tilting Long	4750@1060	4150@1505	3700@1950	3300@2105	2500@2475	1300@2845	760@3220	480@3590
35A-JTF-F-0100 Fixed Tilt	3500@830	850@1420	500@1910	350@2395				
47A-JTF-F-0100 Fixed Tilt	4700@830	1200@1420	700@1910	500@2395				

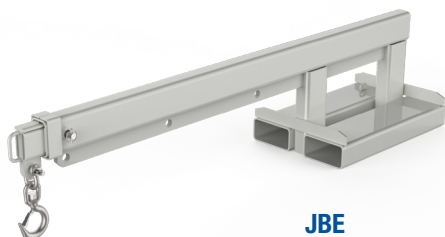


JBE




JBA



JBE - Low



JST

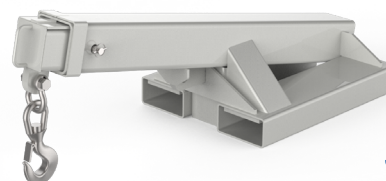

JTF

Catalogue Order Number	Capacity (kg)	Jib Height (mm)	Jib Length (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Minimum Reach Retracted (mm)	Maximum Reach Ext (mm)	Weight (kg)	H.C Of G. (mm)	V.C of G. (mm)
20A-JBF-F-0100 Flat Jib	2000	140	1035	142x55	250	500	1000	41	492	-24
20A-JST-F-0100 Flat Jib with Tow Ball	2000*	N/A	1320	142x55	250	575	1160	50	656	-24
75A-JBE-F-0125 Low Profile Extending Short	7500	578	1348	230x130	790	920	2250	376	573	98
75A-JBE-F-0100 Low Profile Extending Long	7500	578	2147	230x130	790	920	3565	473	801	136
95A-JBE-F-0125 Low Profile Extending Short	9500	670	1348	230x130	790	920	2005	459	583	149
95A-JBE-F-0100 Low Profile Extending Long	9500	670	2147	230x130	790	920	3565	592	830	194

* NOTE: Towing Capacity Limited to 500KG

Capacity Chart (kg) @ Load Centre LC(mm)

Model Number	Hook Position							
	1	2	3	4	5	6	7	8
20A-JBF-F-0100 Flat Jib	2000@500	2000@1000						
20A-JST-F-0100 Flat Jib with Tow Ball	2000@575	2000@1160						
75A-JBE-F-0125 Low Profile Extending Short	7500@920	3600@1245	2700@1625	2250@2005				
75A-JBE-F-0100 Low Profile Extending Long	7500@920	6410@1380	5700@1805	4950@2045	3750@2425	1950@2805	1140@3185	720@3565
95A-JBE-F-0125 Low Profile Extending Short	9500@920	4800@1245	3600@1625	3000@2005				
95A-JBE-F-0100 Low Profile Extending Long	9500@920	8550@1380	7600@1805	6600@2045	5000@2425	2600@2805	1520@3185	920@3565

* NOTE: Towing Capacity Limited to 500KG